

The efficient and reliable method to bundle boxes, corrugated carton, veneer, strip-wood, profiles, any kind of rods.

The versatility of our Twine Tyers is almost unlimited: angular or round packages, soft or firm products.



T 35 – T 35 S RT








T 35 – T 35 SRT BUNDLING MACHINES




Technical Data

- single, double and cross tying
- frame of solid welded construction with 4 solid rollers
- variable string tension
- cotton, polyethylene and elastic twine applicable
- up to 48 cycles single wrap and up to 38 cycles double wrap per minute
- height of working platform adjustable from 775 – 855 mm
- also available with side knotting unit and/or roller table

T 35

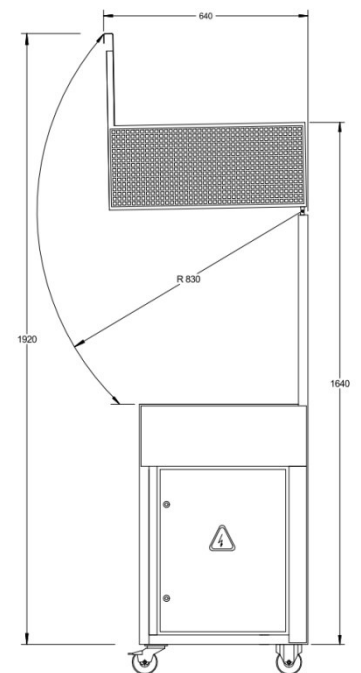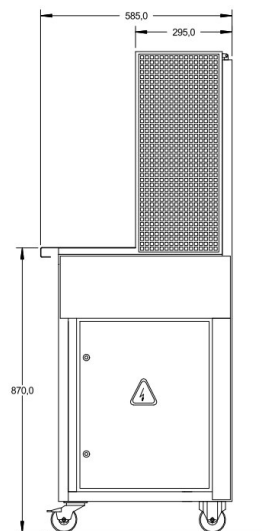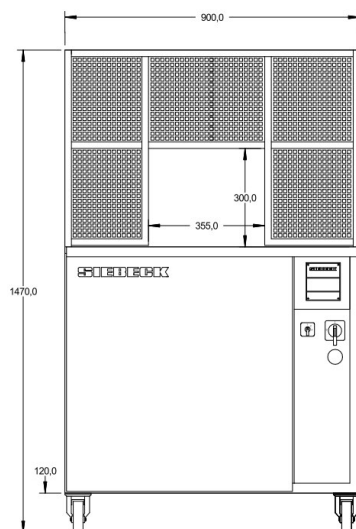

T 35 SRT with side knotting unit and/or roller table

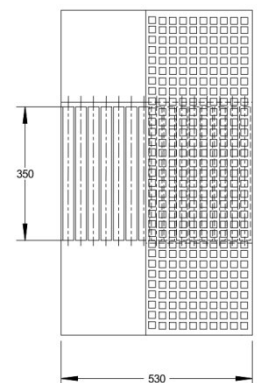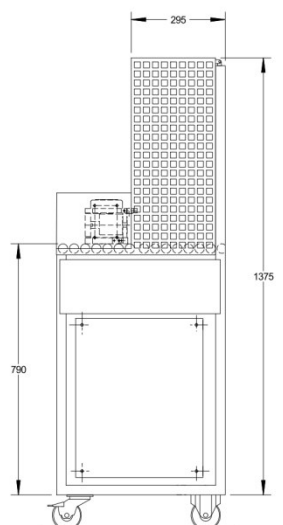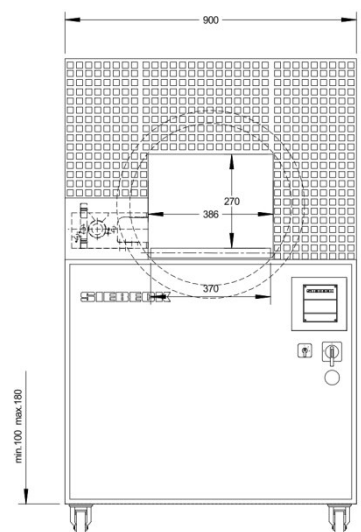

Connected electrical load: 400 Volt / 50 Hz / 3 Phase + PE / 1,4 KW
Machine performance: 48 single- 38 double tying p/min.

Machine weight :
Noise pressure level:

150 Kg
72 dB(A) EN 11204 (without product)

SIEBECK
STRING TYING MACHINES

Siebeck GmbH · D-69412 Eberbach
Telefon + 49(0)6271-9208-0 · Telefax + 49 (0) 6271-9208-88
e-mail: info@siebeck.de · www.siebeck.de