

The efficient and reliable method to bundle boxes, printed matter, corrugated carton, textiles. The versatility of our Twine Tyers is almost unlimited: angular or round packages, soft or firm products



S55-S100






S55-S100 BUNDLING MACHINES

TECHNICAL DETAILS AND SPECIFICATION

- provides a securely tied package using polyethylene, cotton or elastic twine with a quick and easy operation, ideal for any packaging application
- single, double or cross tying
- meets worldwide standards for safety, CE approved
- uses the unique Jet 2000 Knotter Unit
- variable string tension
- heavy duty motors for industrial use

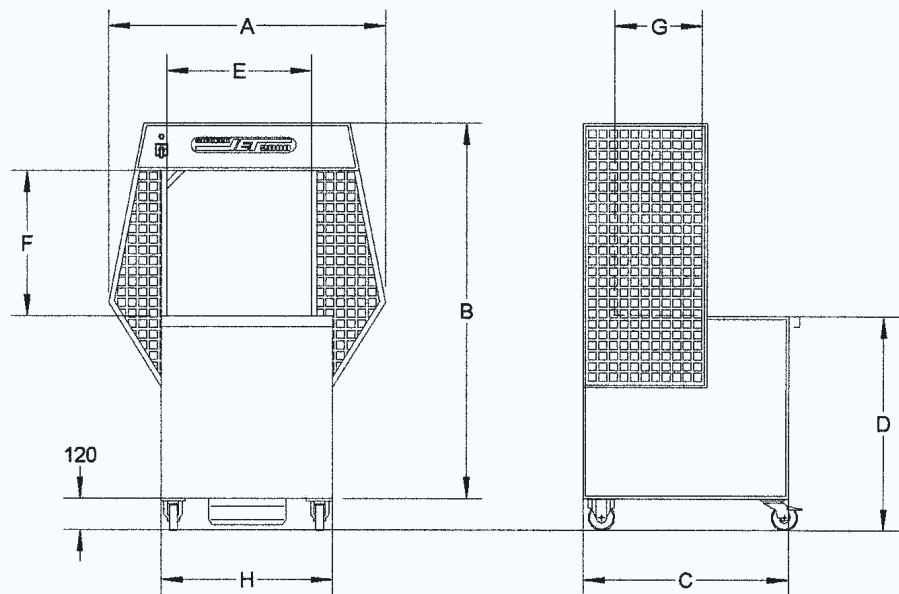

Power supply: 230/400 Volt, 3-phase +PE, 50 Hz, 0.9 kW

All measurements in mm, specification are subject to change without notice

Model	A	B	C	D	E	F	G	H	Cycles/min single/double	weight in Kg
S 55	1.040	1.535	825	795	550	550	320	650	52/40	150
S 65	1.180	1.625	825	795	650	660	320	800	52/40	160
S 80	1.450	1.865	845	795	800	920	380	840	50/36	180
S 100	1.800	2.125	880	800	1.000	1.000	430	1.095	35/25	220