

The efficient and reliable method to bundle boxes, corrugated carton, veneer, strip-wood, profiles, any kind of rods.

The versatility of our Twine Tyers is almost unlimited: angular or round packages, soft or firm products.



T30-T120






T 30-T 120 - BUNDLING MACHINES

TECHNICAL DETAILS AND SPECIFICATION

- provides a securely tied package using polyethylene, cotton or elastic twine
- single or double tying
- variable string tension
- meets worldwide standards for safety, CE approved
- uses the unique JET 2000 Knotter Unit
- heavy duty motors for industrial use
- also available with pneumatic pressing unit
- on request in stainless steel for the food industry or fully automatic with infeed- and outfeed- conveyors, photocells, PLC-controlled

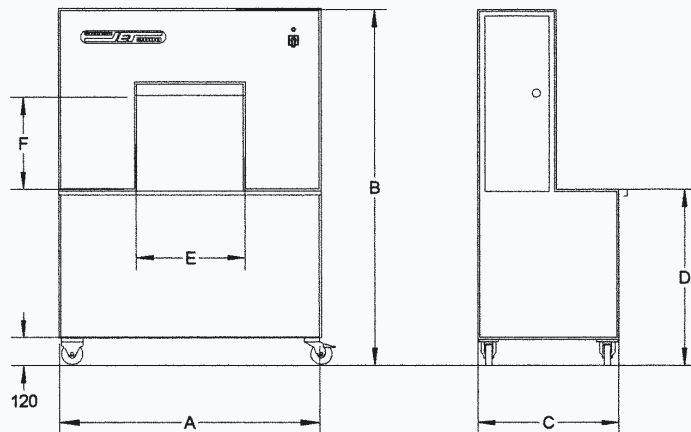

Power supply: 230/400 Volt, 3-phase +PE, 50Hz, 0.9 kW

All measurements in mm, specification are subject to change without notice

Model	A	B	C	D	E	F	Cycles/min single/double	weight in Kg
T 30	900	1.380	700	800	300	240	44/35	210
T 50	1.230	1.660	700	810	500	500	43/31	282
T 65	1.360	1.840	700	810	650	650	43/31	312
T 90	1.530	1.890	700	890	900	550	38/24	360
T 120	1.810	2.030	690	850	1.200	500	32/20	430